



PFM115S-20-1000

DC MILITARY FILTER

(E.G. MIL-STD-461, DO-160, ETC.)

**SPECIFICATIONS**

MAX VOLTAGE: 0-500VDC

MAX CURRENT: 20A/LINE

OPERATING TEMP.: -40 TO 70C

HIPOT (L-G): 1800VDC

TYP. WEIGHT, LB(KG): 5.5(2.5)

MANUFACTURED IN ACCORDANCE WITH



THE FOLLOWING STANDARDS:

UL1283

MIL-STD-220

MIL-F-15733

LV DIRECTIVE

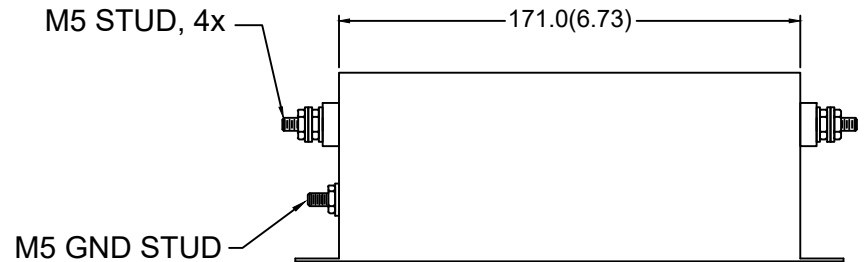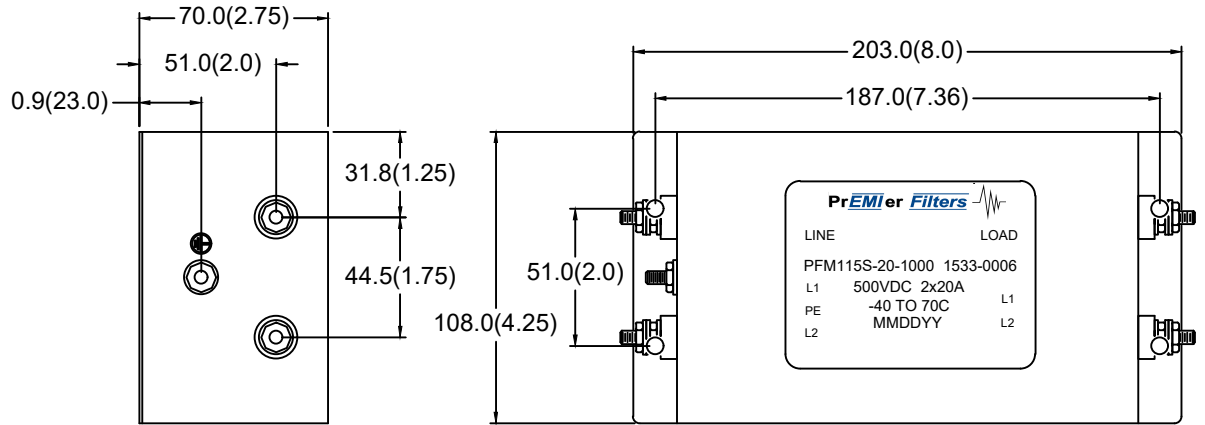

TYPICAL INSERTION LOSS, 50/50 OHM					
FREQ(HZ)	10K	100K	500K	1M	10M
CM,dB	40	60	70	67	55
DM, dB	42	58	62	65	49

SPECIFICATIONS SUBJECT TO CHANGE