



## PFM400S-100-100


3PH WYE MILITARY FILTER  
(E.G. MIL-STD-461, DO-160, ETC.)

### SPECIFICATIONS


- MAX VOLTAGE: 0-520VAC
- MAX CURRENT: 100A/LINE
- FREQUENCY: 50/60/400HZ
- OPERATING TEMP.: -40 TO 70C
- HIPOT (L-G): 1800VDC
- LEAKAGE CURRENT(250V/60HZ): <3.5mA
- TYP. WEIGHT, LB(KG): 14(6.4)
- MANUFACTURED IN ACCORDANCE WITH

#### THE FOLLOWING STANDARDS:

- UL1283
- MIL-STD-220
- MIL-F-15733
- LV DIRECTIVE

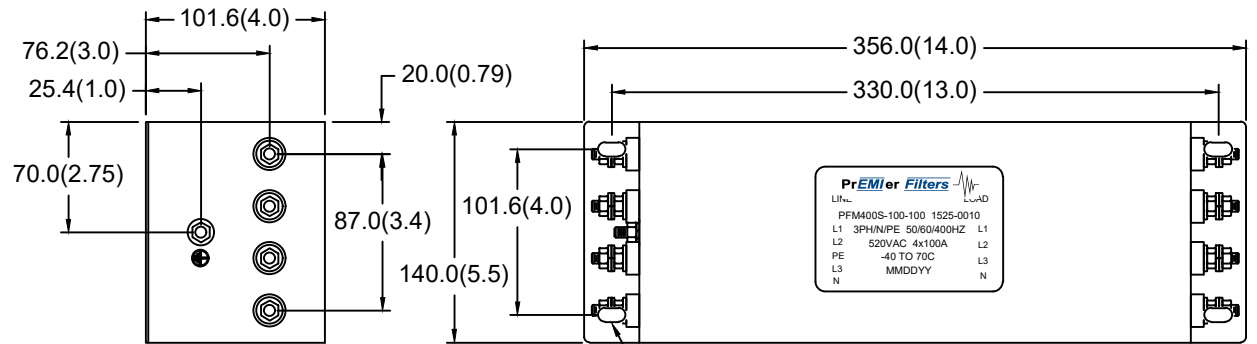

MTG SLOTS, 6.35x12.70.25x0.5), 4X

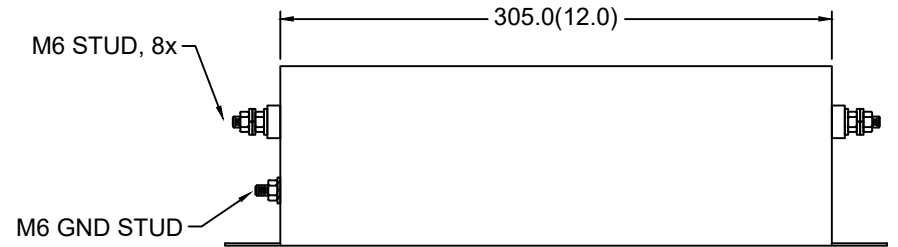

TYPICAL INSERTION LOSS, 50/50 OHM					
FREQ(HZ)	10K	100K	500K	1M	10M
CM,dB	20	32	55	58	42
DM, dB	26	44	60	60	40