



PFM400S-60-100

3PH WYE MILITARY FILTER

(E.G. MIL-STD-461, DO-160, ETC.)

SPECIFICATIONS

MAX VOLTAGE: 0-520VAC

MAX CURRENT: 60A/LINE

FREQUENCY: 50/60/400HZ

OPERATING TEMP.: -40 TO 70C

HIPOT (L-G): 1800VDC

LEAKAGE CURRENT(250V/60HZ): <3.5mA

TYP. WEIGHT, LB(KG): 10(4.5)

MANUFACTURED IN ACCORDANCE WITH


THE FOLLOWING STANDARDS:

UL1283


MIL-STD-220

MIL-F-15733

LV DIRECTIVE

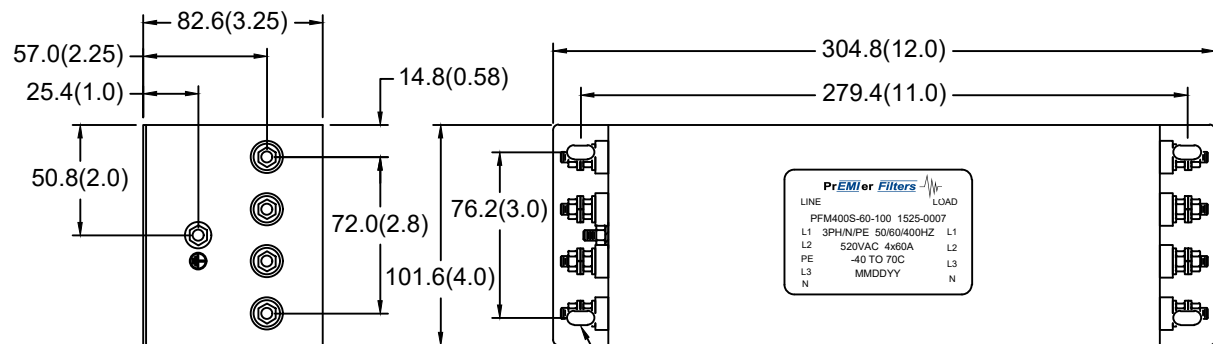

MTG SLOTS, 6.35x12.70.25x0.5), 4X

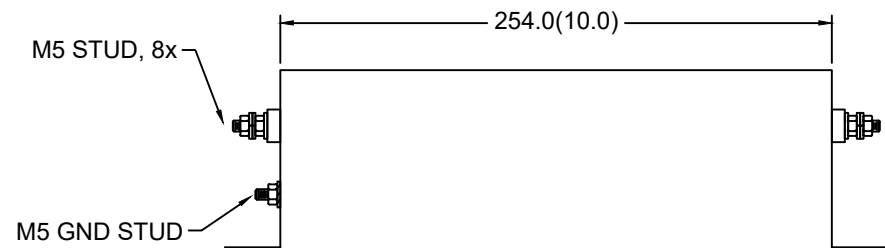

TYPICAL INSERTION LOSS, 50/50 OHM

FREQ(HZ)	10K	100K	500K	1M	10M
CM,dB	20	32	55	58	42
DM, dB	26	44	60	60	40