



PFM65S-25-22

1PH MILITARY FILTER

(E.G. MIL-STD-461, DO-160, ETC.)

SPECIFICATIONS

MAX VOLTAGE: 0-300VAC

MAX CURRENT: 25A/LINE

FREQUENCY: 50/60/400HZ

OPERATING TEMP.: -40 TO 70C

HI POT (L-G): 1800VDC

LEAKAGE CURRENT(@250V/60HZ): <3.5mA

TYP. WEIGHT, LB(KG): 0.8(0.36)

MANUFACTURED IN ACCORDANCE WITH




THE FOLLOWING STANDARDS:

UL1283

MIL-STD-220

MIL-F-15733

LV DIRECTIVE

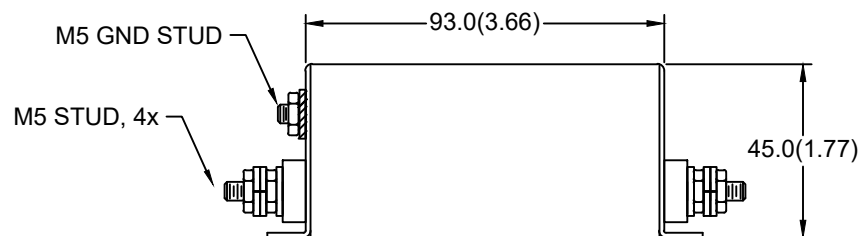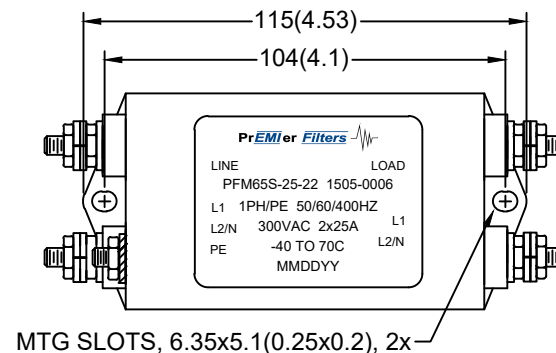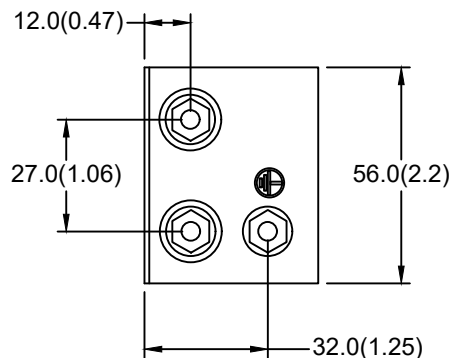

| TYPICAL INSERTION LOSS, 50/50 OHM | | | | | |
|-----------------------------------|-----|------|------|----|-----|
| FREQ(HZ) | 10K | 100K | 500K | 1M | 10M |
| CM,dB | 20 | 35 | 54 | 50 | 48 |
| DM, dB | 25 | 44 | 60 | 60 | 42 |

SPECIFICATIONS SUBJECT TO CHANGE